

IT

I nuovi tavoli refrigerati **EVOLVE** sono costruiti con una struttura a monoscocca in acciaio inox AISI 304.


- Finitura esterna satinata scotch-brite;
- spessore di isolamento di 60mm per la scocca e 50mm per le porte con schiumatura ad alta densità (40 kg/mc);
- schiena esterna in acciaio inox AISI 304 scotch-brite;
- piedini in acciaio inox regolabili in altezza H 140/230mm;
- cella con angoli arrotondati per una migliore pulizia interna;
- porte auto-chiudenti con fermo a 95°;
- guarnizioni magnetiche porta e cassetti facilmente sostituibili;
- unità refrigerante estraibile per una più facile assistenza/manutenzione;
- sistema di ventilazione canalizzata sulla schiena per una perfetta ed omogenea temperatura interna;
- sbrinamento a gas caldo ed evaporazione automatica dell'acqua di condensa;
- maniglie ergonomiche;
- opzionale il vano tecnico a sinistra;
- filtro condensatore in acciaio inox di serie;
- fondo esterno in acciaio inox opzionale;
- alimentazione standard 230V/50Hz;
- gas refrigerante R134a;
- cerniere porte superiori ed inferiori fissate frontalmente sulla scocca (intercambiabili senza dover togliere il piano di lavoro);
- porte reversibili.




The new **EVOLVE** refrigerated counters are built with a monocoque structure in stainless steel AISI 304.


- External scotch-brite satin finish;
- 60mm insulation thickness for the casing and 50mm for the doors with high density foam (40 kg/mc);
- external back plate in stainless steel AISI 304 scotch-brite;
- feet in stainless steel adjustable in height H 140/230mm;
- cell with rounded corners for a more effective internal cleaning;
- self-closing doors with safety stop at 95°;
- easily removable door and drawers magnetic gaskets;
- extractable refrigerating unit for easier service/maintenance;
- ducted ventilation system on the back for a perfect and homogeneous internal temperature;
- hot gas defrost and automatic evaporation of condensation water;
- ergonomic handles;
- Available on request with the technical compartment on the left;
- standard supplied with stainless steel condenser filter;
- available with optional stainless steel external bottom;
- standard power supply 230V/50Hz;
- cooling gas R134a;
- upper and lower door hinges fixed frontally to the frame (replaceable with no need to remove the worktop);
- reversible doors.


EN




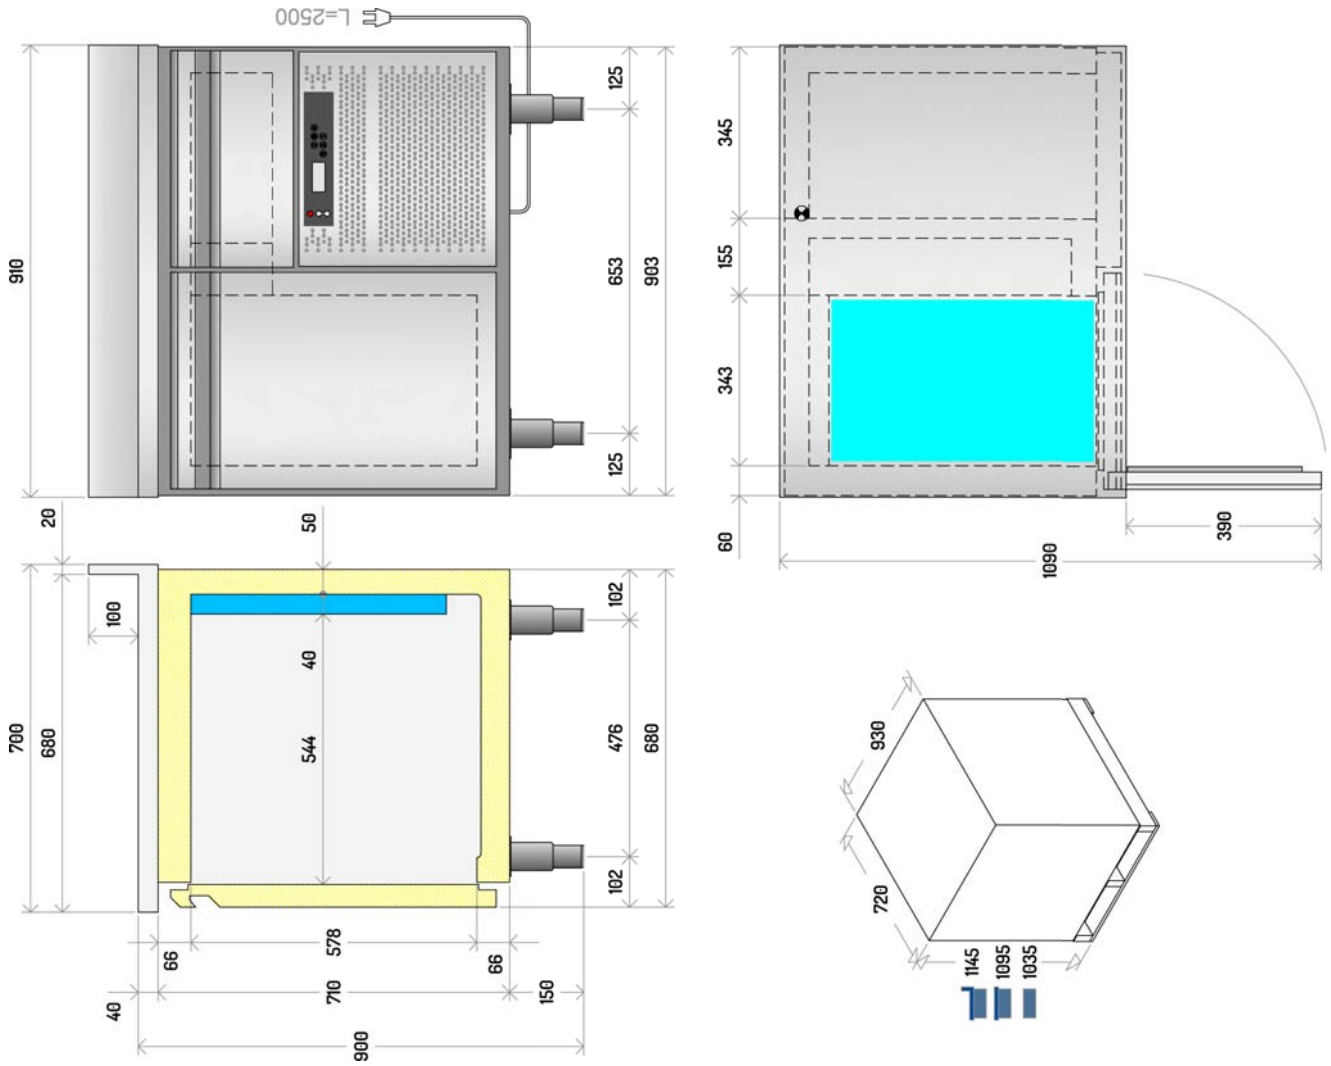


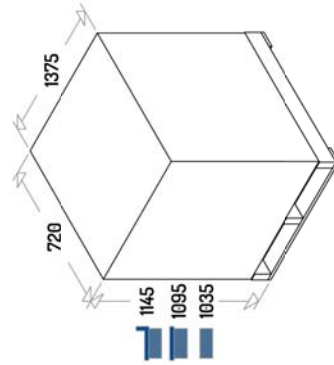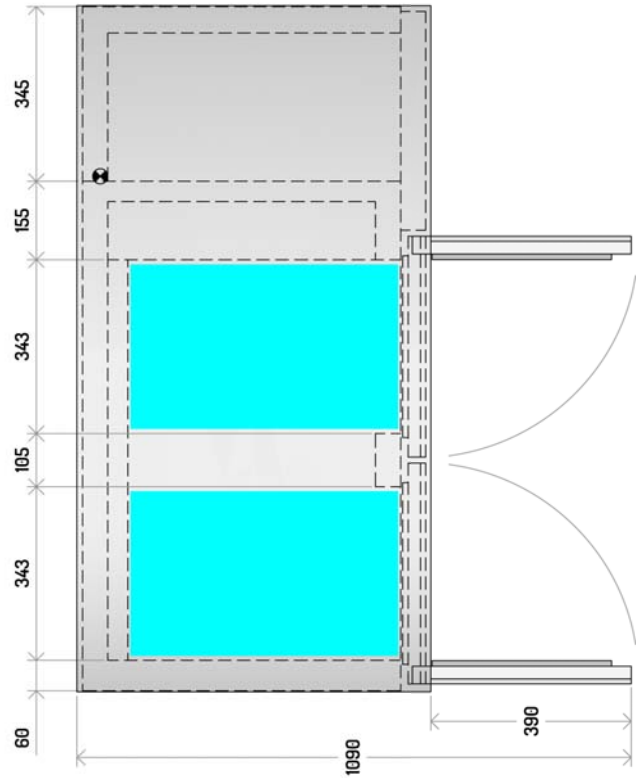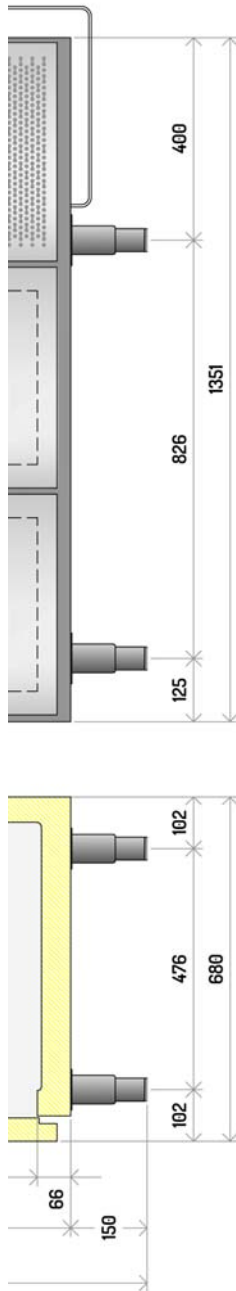

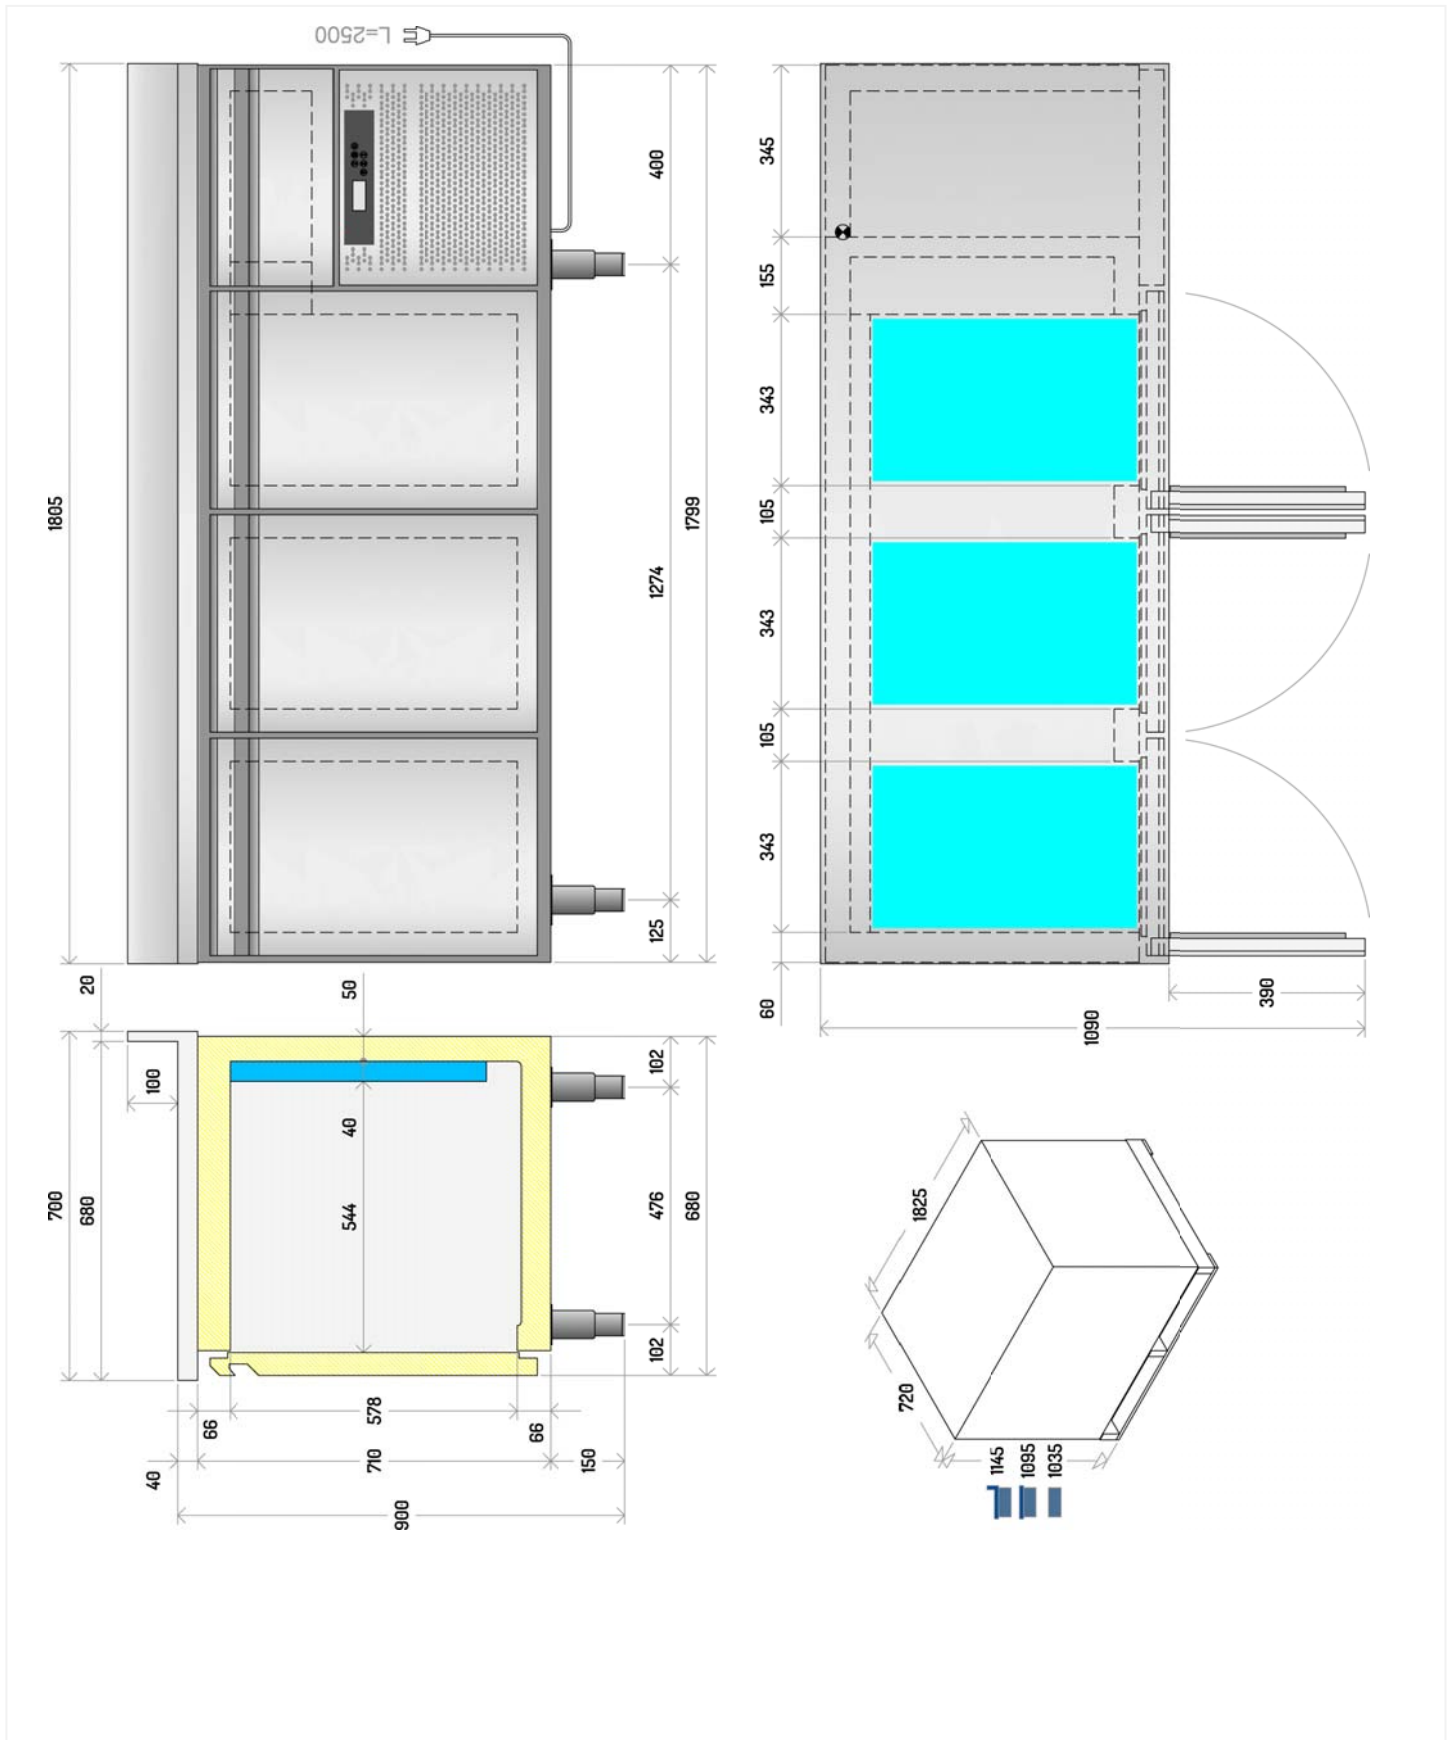

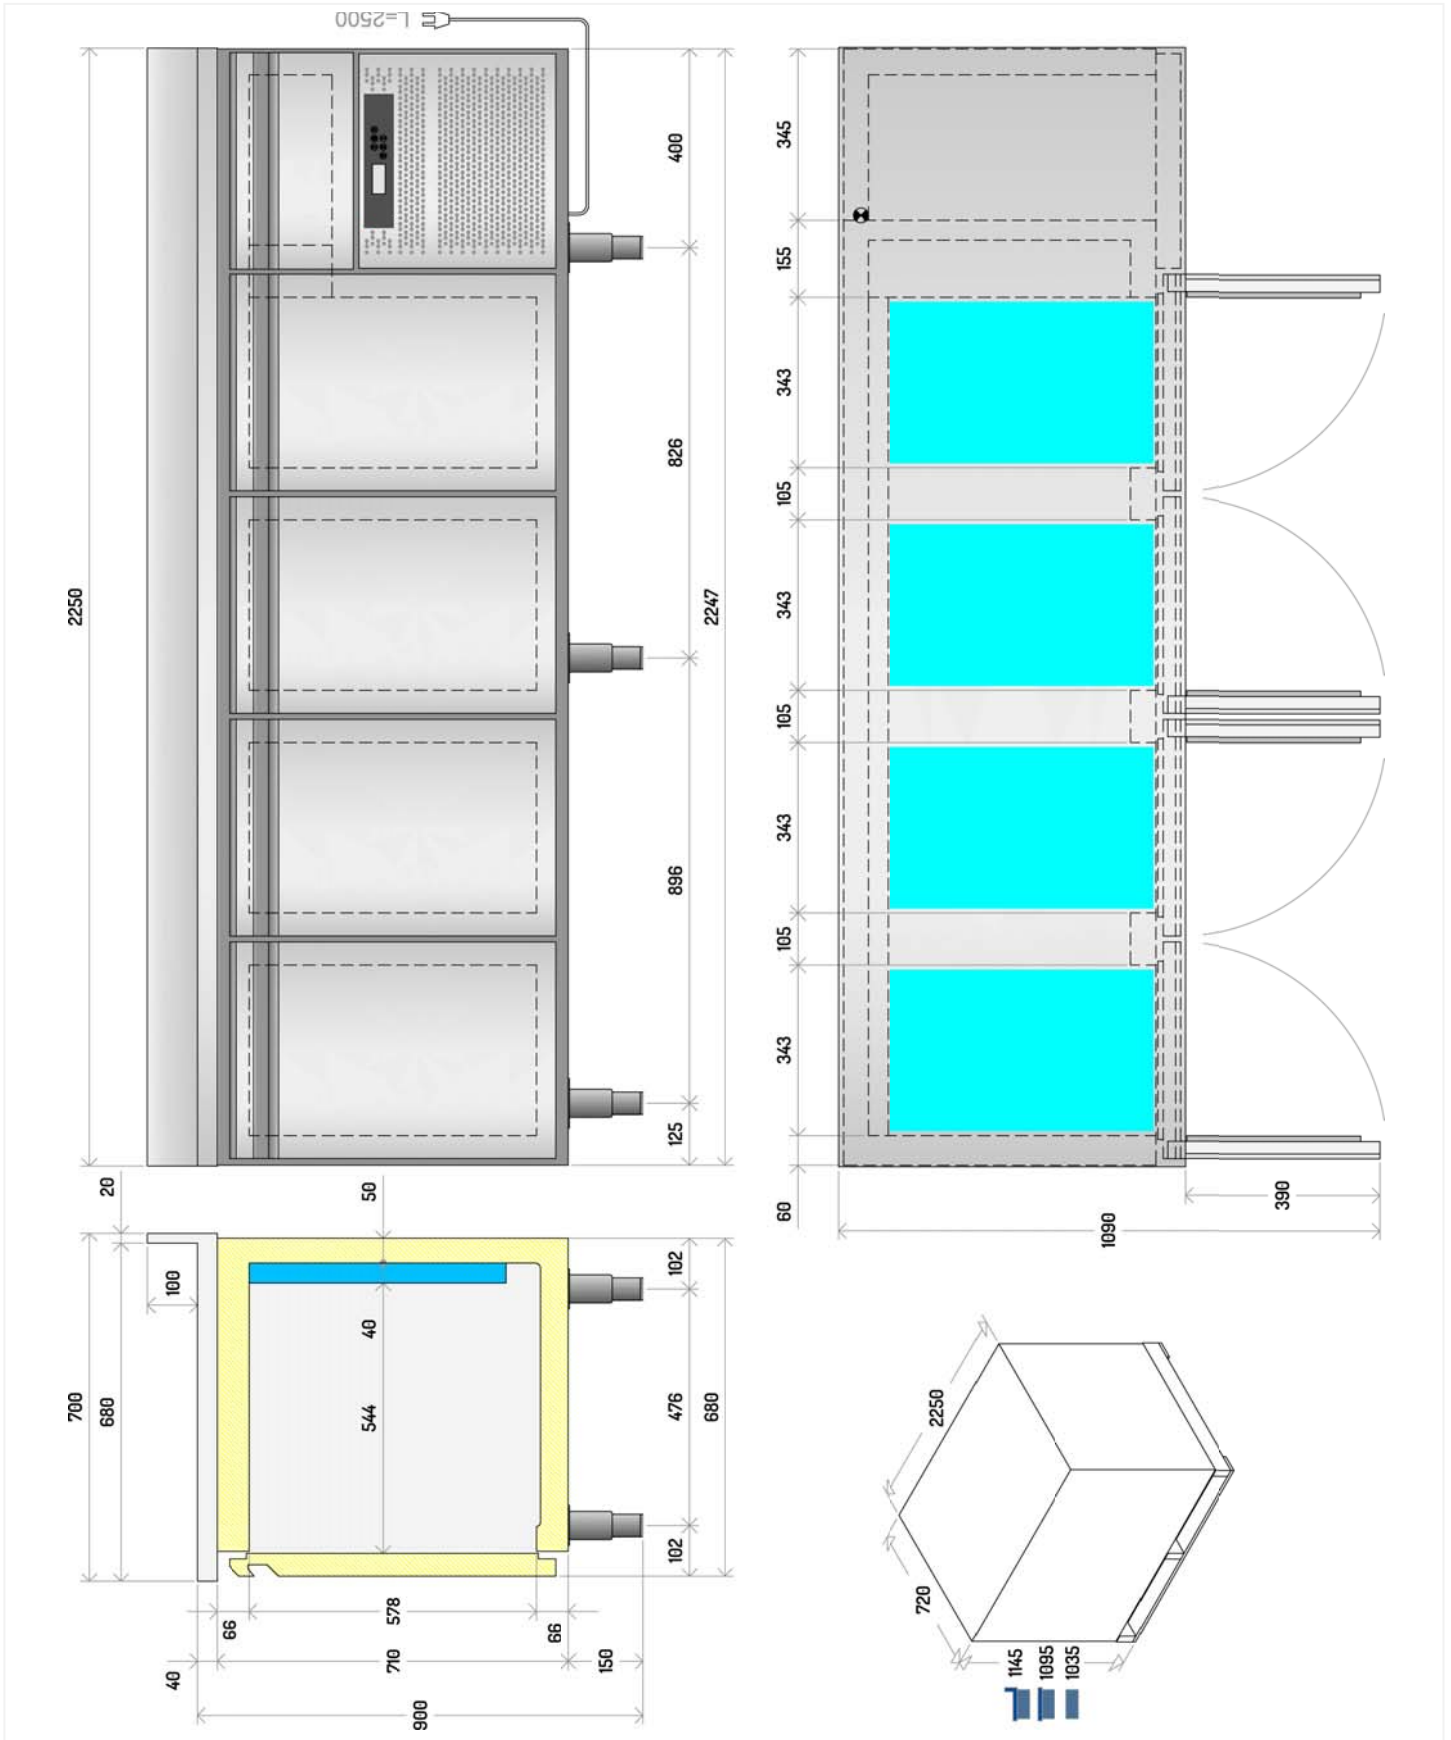

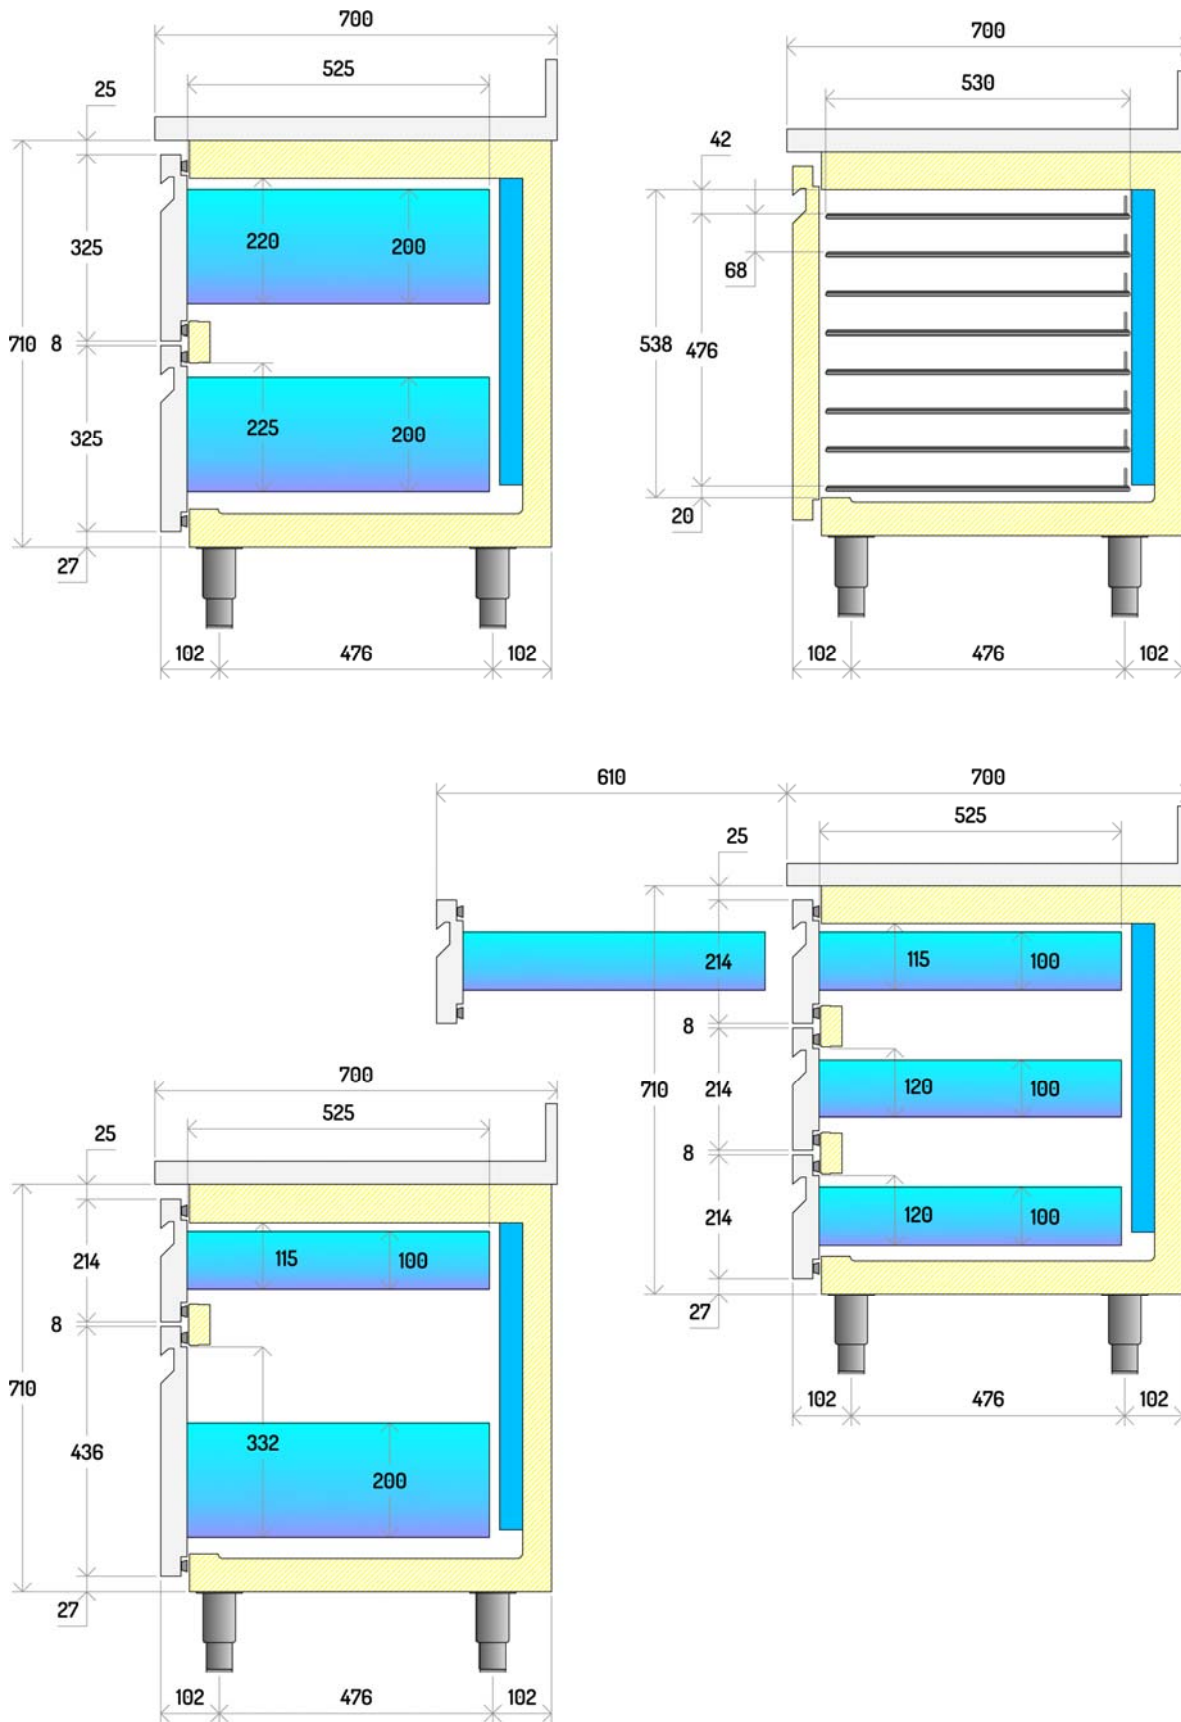

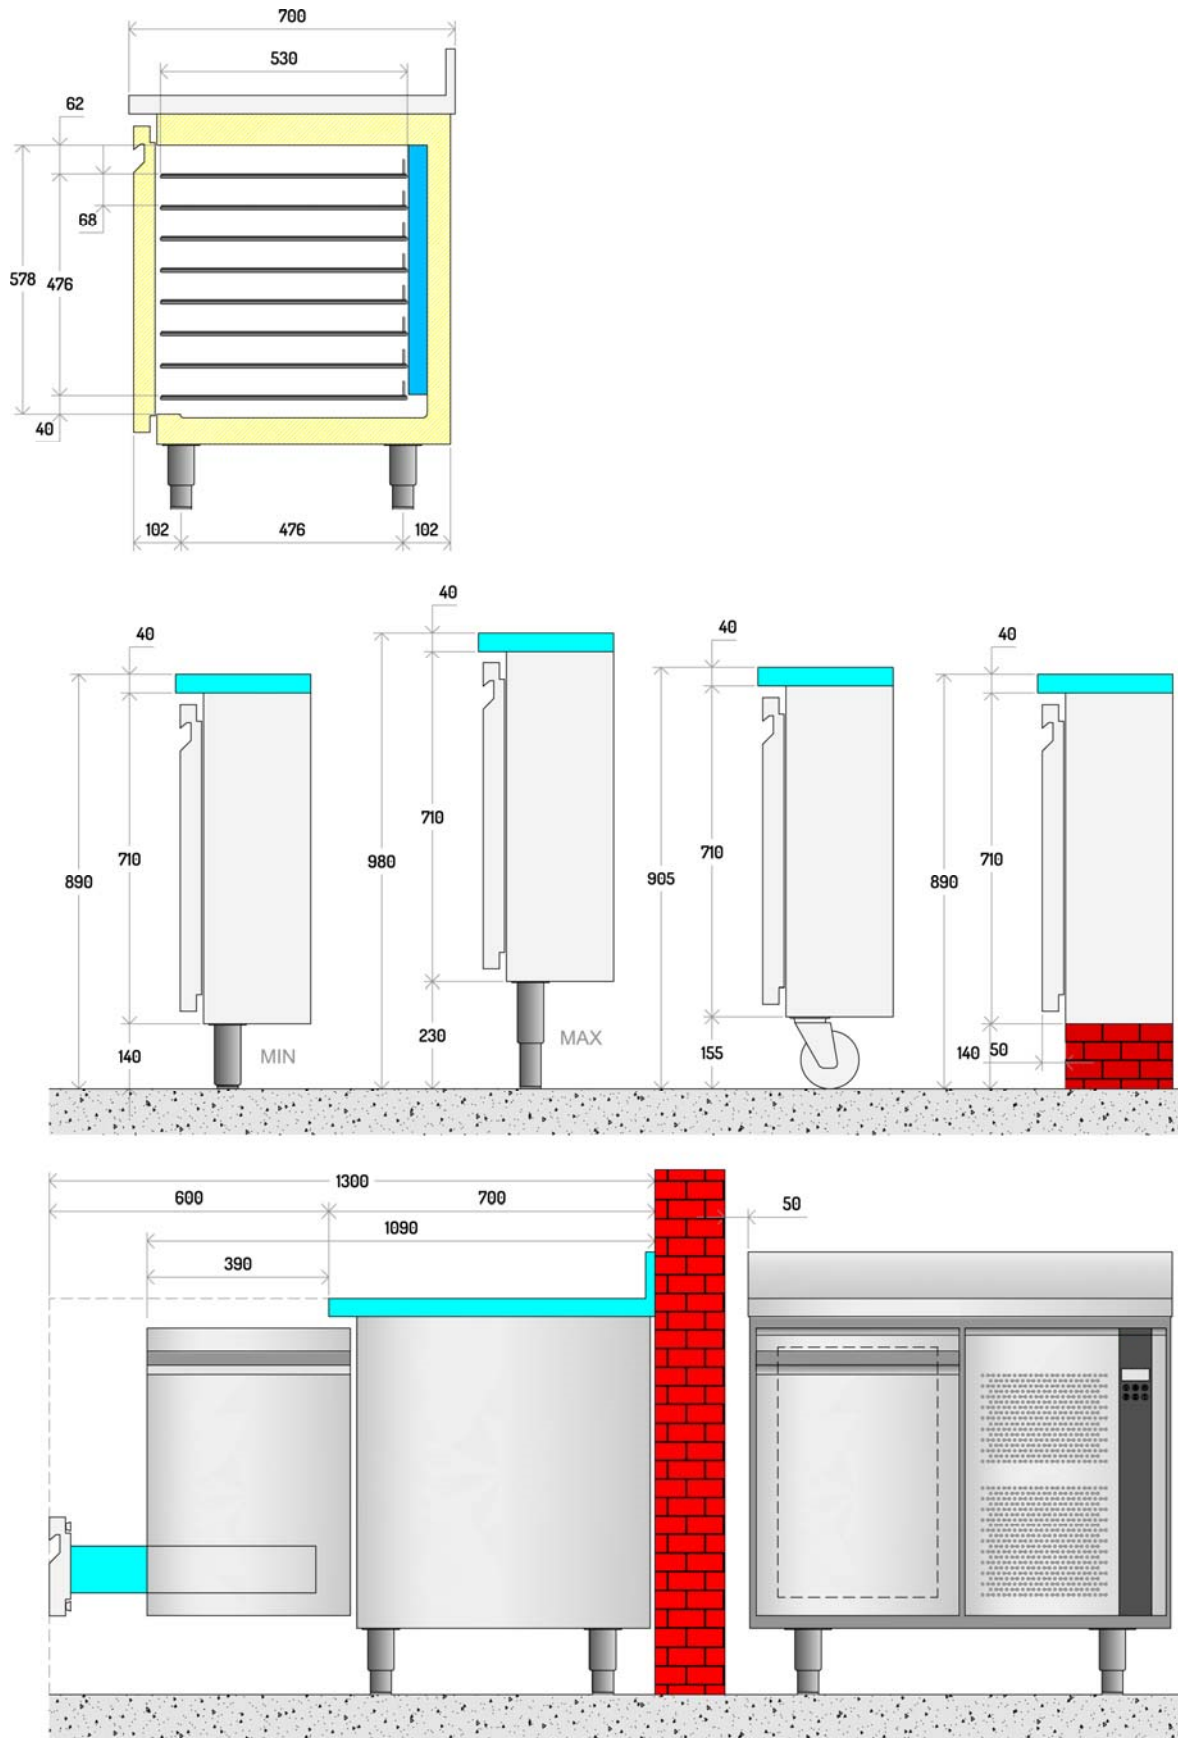

	Modello - Model - Model - Gerätetyp	T9CG 1V 15 00	T9CG 2V 15 00	T9CG 3V 15 00	T9CG 4V 15 00
		T9CG 1V 15 10	T9CG 2V 15 10	T9CG 3V 15 10	T9CG 4V 15 10
		T9CG 1V 15 20	T9CG 2V 15 20	T9CG 3V 15 20	T9CG 4V 15 20

EVOLVE C/C 50 Hz



Descrizione - Description - Description - Beschreibung		1 Door	2 Doors	3 Doors	4 Doors
Range		-2°C...+8°C	-2°C...+8°C	-2°C...+8°C	-2°C...+8°C
SX Version		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Funzionamento - Operating Mode - Mode de fonctionnemen - Betriebsmodus S = Statico-Static-Statique-Stille Kühlung V = Ventilato-Ventilated-Ventile-Umluftkühlung		V	V	V	V
Capacità lorda - Gross Capacity - Capacité brute - Bruttovolumen	l	105	243	381	519
Materiale Esterno - External Material - Matériau Extérieur - Werkstoff Außen		3 0 4	3 0 4	3 0 4	3 0 4
Dimensioni Esterne - External Dimension - Dimensions externes - ußenabmessungen					
Lunghezza - Width -Largeur - Breite	mm	903	1351	1799	2247
Profondità / con porte aperte - Depth / with open doors Profondeur avec portes ouverte - Tiefe/mit geöffneter Tü	mm	680/1090	680/1090	680/1090	680/1090
Altezza - Height - Hauteur - Höhe	mm	850	850	850	850
Materiale Interno - Internal Material - Matériau Intérieur - Werkstoff Innen		3 0 4	3 0 4	3 0 4	3 0 4
Dimensioni interne - Internal Dimension - Dimensions internes - Innenabmessungen					
Lunghezza - Width -Largeur - Breite	mm	343	791	1239	1687
Profondità - Depth - Profondeur - Tiefe	mm	530	530	530	530
Altezza - Height - Hauteur - Höhe	mm	580	580	580	580
Porte - Doors - Portes - Türen		1	2	3	4
Dotazione Standard - Standard Equipment - Equipement standard - Standardausstattung		Griglia plastificata - Plastic-Coated Grid Grille Plastifiée - Kunststoff-Beschichtetes Gitter GN 1/1			
		1	2	3	4
Serratura - Lock - Serrure - Schloss		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Sbrinamento - Defrost - Dégivrages - Abtauen					
Type		Gas caldo - Hot gas - Gaz chaude - Heissem Gas			
N° Defrost in 24 hrs.		3			
Evaporazione acqua sbrinamento - Evaporation of defrost water Evaporation eau de dégivrage - Tauwasserverdunstung		Gas caldo - Hot gas - Gaz chaude - Heissem Gas			
Compressor		embraco			
Model		EMT6170Z			
Potenza - Power - Puissance - Leistung	HP	1/3-			
T° Evaporation	°C	-10			
Potenza frigorifera - Refrigerant Power - Puissance frigorifique - Kälteleistung	watt	500			
Refrigerante - Refrigerant type - Réfrigérant type - Kältemitteltyp	GWP	R134a (GWP 1430)			
Quantità di refrigerante - Refrigerant quantity - Quantité de réfrigérant - Kältemittelmenge	gr	220			
Potenza assorbita - Total Power - Puissance - Leistung	watt	290W - 1,9A (580W - 2,9 A)			
Tensione alimentazione - Supply Voltage - Tension d'alimentation - Anschlussspannung	V	230V~ 50Hz			
Noise Level	dbA	51			
Peso Netto - Net weight - Poids net - Netto Gewicht	kg	124	149	174	199
Efficienza Energetica - Energy Efficiency - Classe Énergie - Energieeffizienzklasse		A	A	A	A
Energia - Energy - Énergie - Energie	kWh / annum	521	583	658	725
Volume Netto - Net Volume - Volume Net - Nettoinhalt	l	121	243	364	486
Classe Climatica - Climate Class - Classe Climatique - Klima Classe		5 +40°C 40%	5 +40°C 40%	5 +40°C 40%	5 +40°C 40%

● = Dotazione di serie - Standard equipment - Dotation standard - Serien Ausstattung □ = Optional