



3-DOOR REFRIGERATED BASE WITH TOP

DESCO

MOTORIZED

cod. **BNMG3V254**



STRUCTURE monocoque structure in AISI 304 stainless steel, with Scotch-Brite satin finish. The rear panel is made of galvanized steel sheet, while the AISI 304 stainless steel feet, adjustable from 140 to 230 mm, ensure perfect adaptation to any working environment.

INSULATION AND HYGIENE: the cabinet features 60 mm insulation, while the doors are insulated with 50 mm high-density polyurethane foam (40 kg/m^3) to ensure excellent thermal efficiency. The refrigerated compartment with rounded corners facilitates internal cleaning, while the hot gas defrost system with automatic evaporation of condensation water keeps the unit operating efficiently at all times.

FUNCTIONALITY: self-closing doors with a 95° stay-open position, easily replaceable magnetic gaskets, front-fixed reversible hinges, and ergonomic handles ensure ease of use and simplify maintenance, with no need to remove the worktop.

SUPPLIED WITH 3 GN 1/1 plastic-coated shelves.

TECHNICAL DATA

 Range	-20°C...-10°C
 External dimension (mm)	1598 x 650/970 x 600
 Internal dimension (mm)	1204 x 550 x 345
 Gross capacity (L)	228
 Operating mode	Ventilated
 External / internal material	304
 Refrigerant type	R290
 Net weight	158 kg
 Net volume	198
 Energy efficiency	D
 Climate class	5 +40°C 40%

ELECTRICAL DATA

 Defrost	Hot gas
 N° Defrost in 24 hrs	3
 Refrigerant power	425 watt
 Supply voltage (V)	230V 50Hz
 Total power	200W - 1A
 Noise level	51 dbA
 Energy (kWh / annum)	2597




3-DOOR REFRIGERATED BASE WITH TOP

DESCO

MOTORIZED

cod. **BNMG3V254**

TECHNICAL DRAWINGS

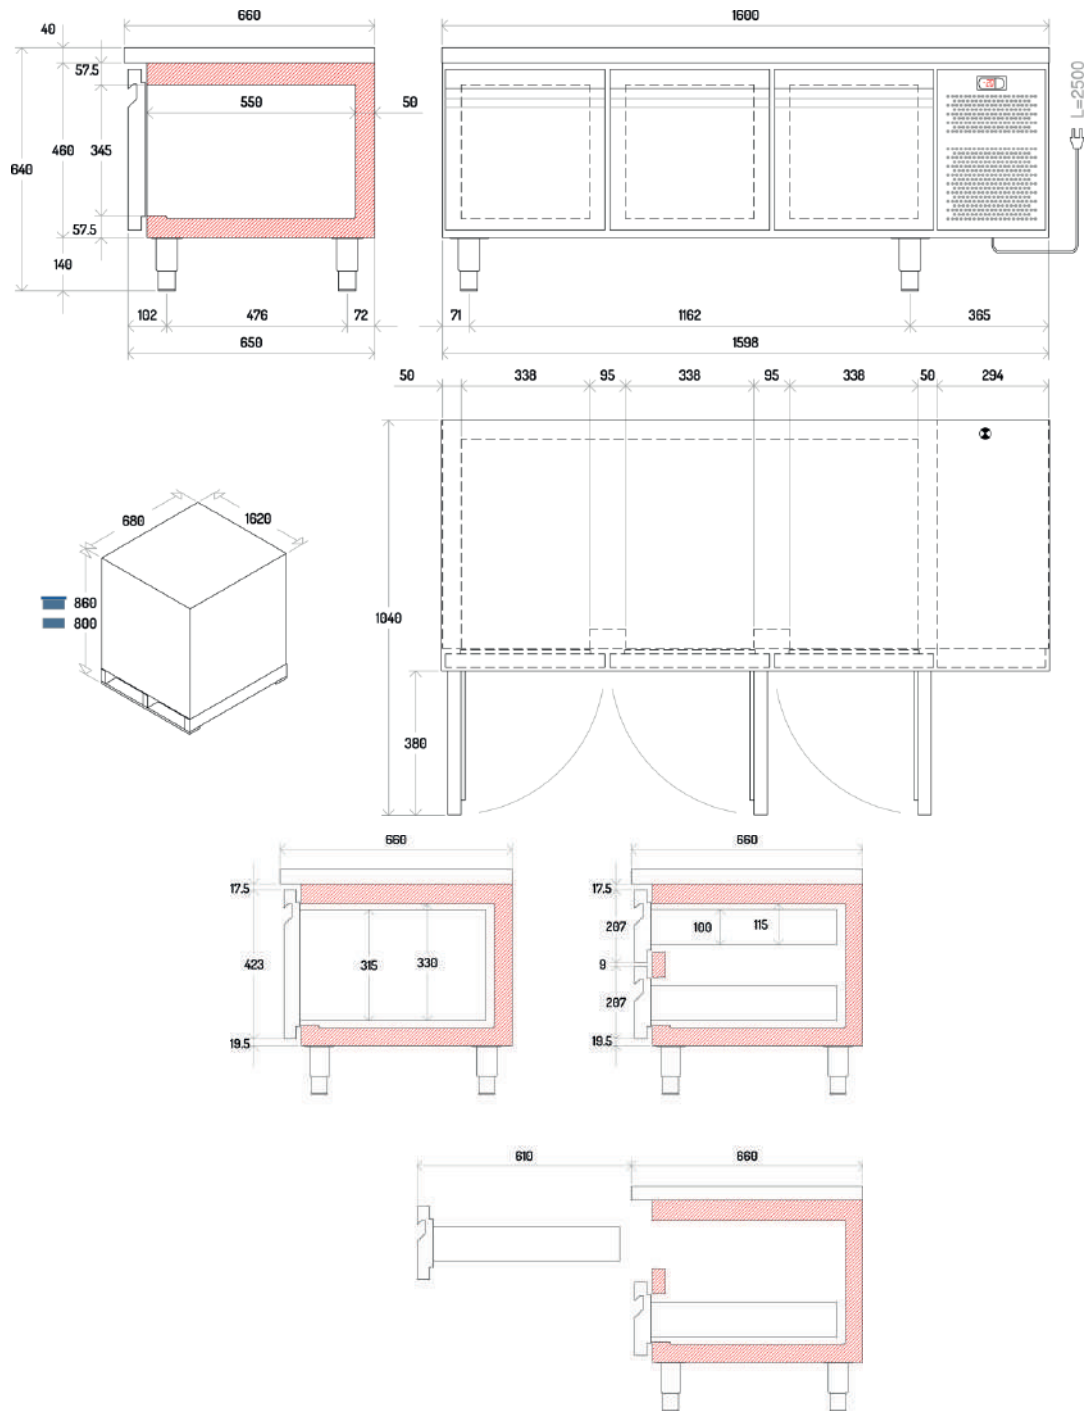

LEGEND



3-DOOR REFRIGERATED BASE WITH TOP

DESCO


MOTORIZED

cod. **BNMG3V254**

ACCESSORIES



KHCA1004
LOCK




LEFT COMPRESSOR




SET OF 2 DRAWERS GN 1/2




SET OF 1 DRAWERS GN 1/1



GTG1005
**PAIR OF STAINLESS
STEEL SLIDES**



**SET OF FILTERER COUPLE
OF STAINLESS STEEL
SLIDES**



GRI0014
PLASTIC-COATED GRID



CASTOR KIT